

## INSTRUCTIONS FOR USE **MGL/MGi 30 – 40**


You have just purchased a MG flykiller and we hope that it will give complete satisfaction.

### USE

Certain installation conditions must be met to ensure an effective control of flying insects in your premises:

1. The model must be suited to the area to be protected : 70m<sup>2</sup>.
2. It is advisable to attach the MG flykiller far from windows and lighting, thereby avoiding natural light and exposure to sunlight.
3. The bulbs must be changed every 12 months.

### INSTALLATION

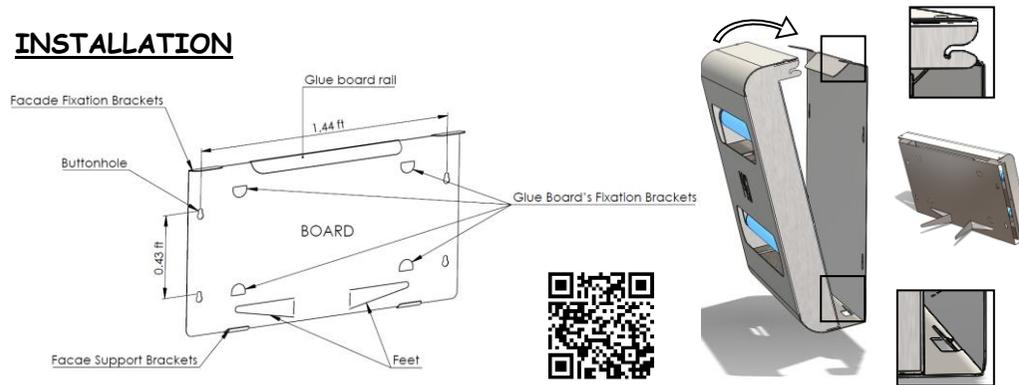

- 1) Fix the board to a wall by oblong hole with 4 screws (optional supply).
- 2) Put the facade on the bottom part of the wall support and clip on the top part.
- 3) Slide the glue board from the side (after having removed the protective film).
- 4) Plug in the appliance (230 V/50 Hz) which must imperatively be connected to an electric socket that is earthed.
- 5) The appliance could also be put standing out with the 2 feet at the back-side.

**DANGER:** This product is under high tension.

**Important :** This appliance is not designed for used by persons (children included) with diminished physical, sensory or mental capacities or no experience or knowledge, except if they are correctly supervised or if they have been given the instructions on how to use the appliance with complete safety and if they understand the risks involved (A2 / EN 60335-1).

## INSTRUCTIONS FOR USE **MGL/MGi 30 - 40**


You have just purchased a MG flykiller and we hope that it will give complete satisfaction.

### USE

Certain installation conditions must be met to ensure an effective control of flying insects in your premises:

4. The model must be suited to the area to be protected : 70m<sup>2</sup>.
5. It is advisable to attach the MG flykiller far from windows and lighting, thereby avoiding natural light and exposure to sunlight.
6. The bulbs must be changed every 12 months.

### INSTALLATION

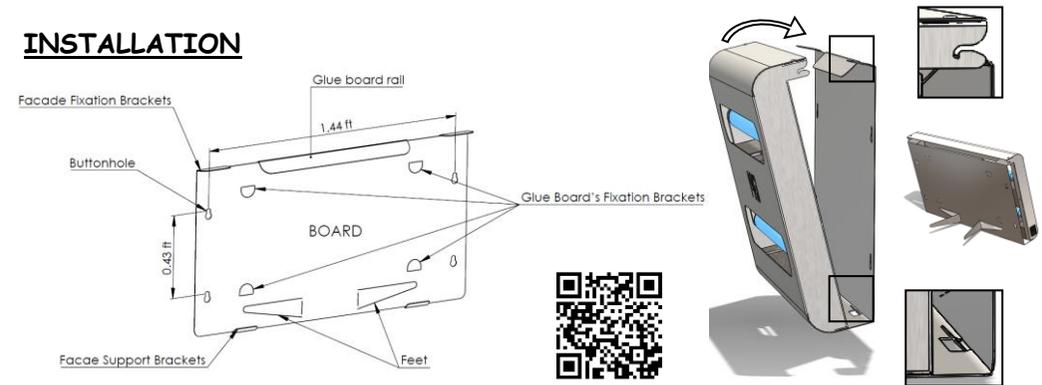

- 6) Fix the board to a wall by oblong hole with 4 screws (optional supply).
- 7) Put the facade on the bottom part of the wall support and clip on the top part.
- 8) Slide the glue board from the side (after having removed the protective film).
- 9) Plug in the appliance (230 V/50 Hz) which must imperatively be connected to an electric socket that is earthed.
- 10) The appliance could also be put standing out with the 2 feet at the back-side.

**DANGER:** This product is under high tension.

**Important :** This appliance is not designed for used by persons (children included) with diminished physical, sensory or mental capacities or no experience or knowledge, except if they are correctly supervised or if they have been given the instructions on how to use the appliance with complete safety and if they understand the risks involved (A2 / EN 60335-1).